


MACal 8900 Pro™

High performance film with removability

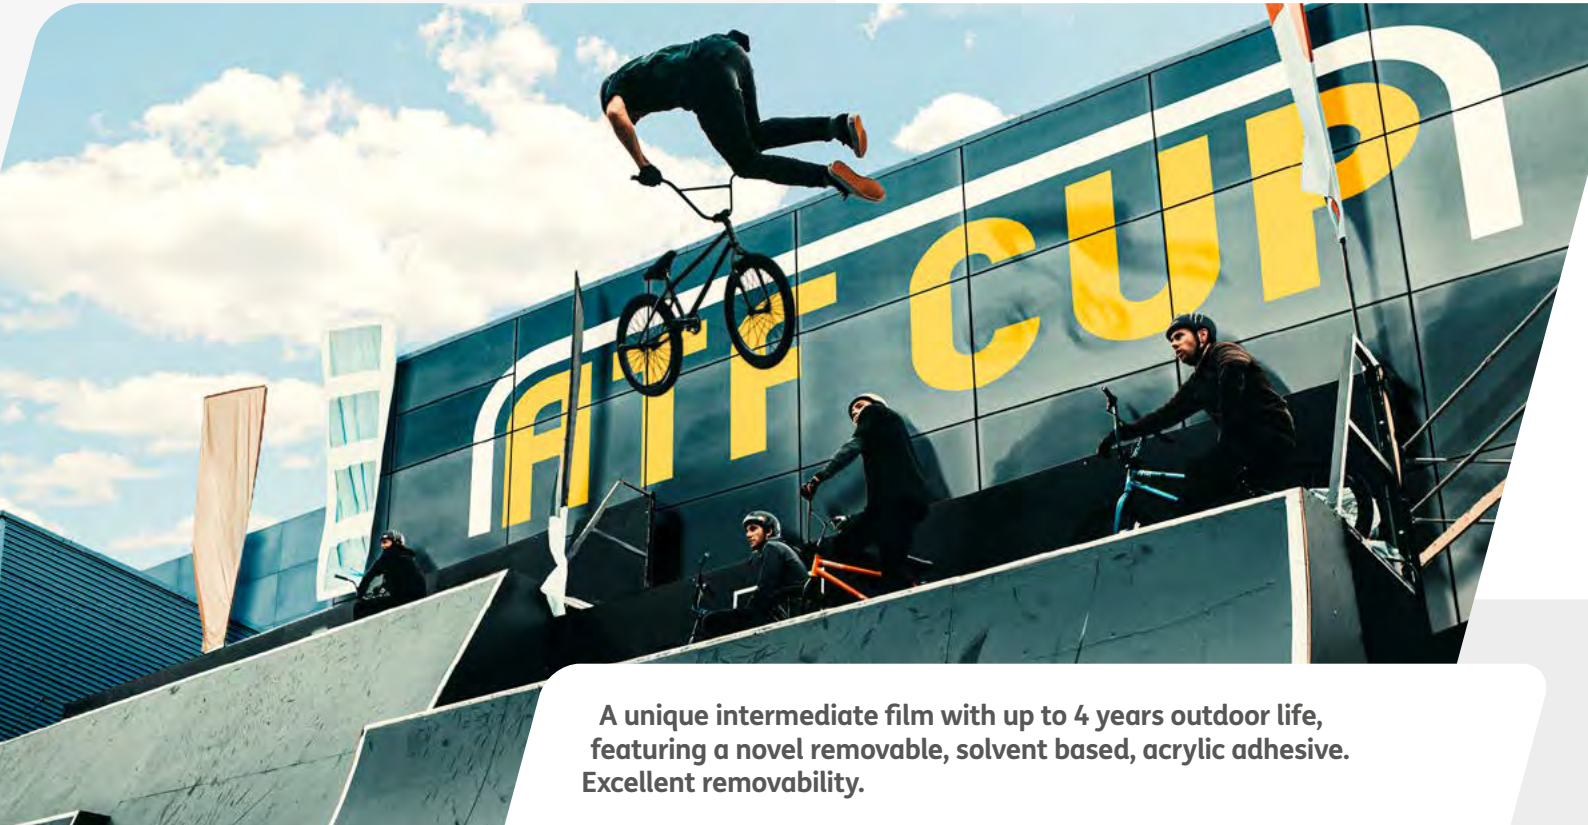

A unique intermediate film with up to 4 years outdoor life, featuring a novel removable, solvent based, acrylic adhesive. Excellent removability.

Intermediate MACal 8900 Pro offers a novel answer to dependable and residue-free removability. This calendared soft vinyl film is coated with a semi-permanent acrylic adhesive for excellent dimensional stability both indoors and outdoors. It can be removed from many common surfaces without leaving adhesive residue for up to 2 years after application.

85 colours (32 gloss and 53 matt) make sure that you have all the design inspiration you need for a huge range of creative projects: graphics and signage on windows, vehicles, exhibitions and point-of-sale signage.

Outdoor durability of up to 4 years means you have the flexibility to extend short-term installations if needed. MACal 8900 Pro is a simple choice for many medium-term outdoor and indoor applications on flat surfaces, and it gives you trouble-free computer cutting and fast weeding, even for small letters and fine lines.

Advantages

- High performance removable adhesive with high dimensional stability
- 85 colours (32 gloss and 53 matt)
- Easy cutting (e.g. small letters/strips)
- Excellent release and optimal weeding, including thin lines and small letters

MACal 8900 Pro™



✓ Durability

- Outdoor durability up to 4 years (black and white) and 3 years (colour)



✓ Applications

- Outdoor & indoor flat surfaces including glass, plexiglass, metal and non-porous substrates
- Interior design, signage and marking, exhibitions, architectural graphics, window graphics, vehicle, light boxes and illuminated signs, point-of-sale signs

✓ Technical characteristics

- 70 µm high performance monomeric PVC film
- Semi-permanent solvent-based acrylic adhesive
- 135 g/m² kraft backing paper with grey print

©2020 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.

All Mactac statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Mactac products are sold with the understanding that the purchaser has independently determined the suitability of such products for its purposes. All Mactac products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

2020_30044_EN